


SL-3000 Universal Demodulator

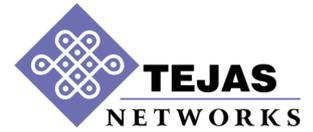

Tejas Networks SL3000, Universal DTV and PNT Demodulator, powered by award-winning patented SDR architecture enables reception of LIVE TV signals on Smart TVs, Set-Top Boxes, and Home Gateways. SL3000 demodulates TV signals compliant to ATSC 1.0, ATSC 3.0, DVB-T/T2/C, ISDBT/C, DVB-S/S2 standards. Further, with custom firmware the chip (SL3000T) can be used in BPS (Alternative PNT Technology) Receivers for demodulating the timing signal and location/ timestamp data.

The full-featured front-end SOC performs baseband DTV demodulation and integrates FEC decoder, de-interleaver memory, and Analog to Digital Converter (ADC) in a single chip.


Leveraging Tejas Networks proven Software Defined Radio (SDR) architecture, SL3000 achieves broadcast-quality reception without the picture/audio breakups while reaching far & remote households or households in dense urban environments.

Additionally, the SOC also supports Advanced Emergency Alert to aid and assist in the deployment of Advanced Warning and Response network infrastructure across the world.


Features

- ✓ Fully programmable SDR architecture-based Demodulator SoC supports existing & new DTV standards
- ✓ High performance, high data rate, multi-standard Demodulator for terrestrial broadcast, satellite and cable TV reception
- ✓ Integrated high precision ADC & PLLs
- ✓ Low power, high-performance & small footprint device

Applications

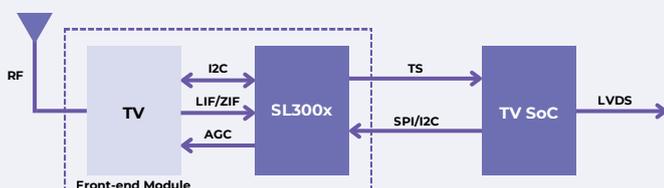

Televisions

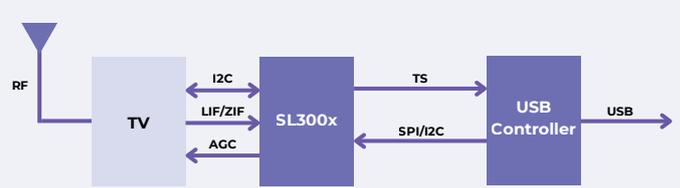

Home Gateways & Dongles

Interfaces

- ✓ ZIF/LIF interface to RF Tuner
- ✓ Serial MPEG-TS interface to Gateway processor/TV SoC
- ✓ I2C/SPI master/slave interface to the TV tuner and back-end TV SoC or Gateway processor
- ✓ DISEQ Interface to control Satellite Antennas

Technical Specifications

Standards Supported

Terrestrial	ATSC 3.0/1.0, DVB-T2/T (DTG, NORDIG), ISDB-T
Cable	QAM, DVB-C, ISDB-C
Satellite	DVB-S/S2

Supports

Programmable Channel BW	Channel BW 5/6/7/8MHz for Terrestrial
	Channel BW 5-54MHz for Satellite
FFT Size	2K/4K/8K/16K/32K
Demodulation Schemes	8VSB, QPSK/8PSK, 16QAM, 64QAM, 256QAM, 1024QAM, 4096QAM
Decoding	16K/64K LDPC, BCH, Viterbi, RS FEC decoding
Multiplexing Mode	TDM, FDM & LDM
Monitoring Parameters	RSSI, C/N, BER, FER

Physical Specifications

Power	0.9V and 1.8V
Operating Temperature	0 to 85°C
Package	8 x 8 mm (0.4mm pitch) 68 pin QFN package, Pb-Free/ROHS compliant

Ordering Information

Part	SL3000
Package	QFN68
Standards	ATSC1.0, ATSC3.x, QAM, DVB-T/T2/C, ISDB-T/C, DVB-S/S2
Description	Universal TV Demodulator for Home



HQ: Bangalore, India

New Delhi | Gurgaon | Mumbai | Kolkata | Chennai

www.tejasnetworks.com | +91-80-4179-4600

info@tejasnetworks.com

USA	UAE
UK	MALAYSIA
KENYA	SINGAPORE
SOUTH AFRICA	MEXICO
NIGERIA	BANGLADESH
ALGERIA	